

RoHS

包装图

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 130 * 135 * 0.10 mm, Packing detail see the table below


将 Housing放入PE袋内, PE袋规为:130*135*0.10mm, 详细包装见下表

2. Put PE bag packed products in specifications of 330 * 250 * 300 mm cartons, Packing detail see the table below

将装好产品的PE袋放入规格为330*250*200mm的纸箱内, 详细包装见下表

3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.

4. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

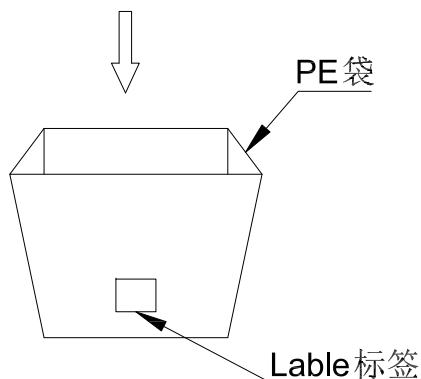

胶带ADHESIVE TAPE

标签LABEL

Poles	Bag PCS	CARTON Bag	CARTON PCS
02	1000	75	75K
03	1000	75	75K
04	1000	75	75K
05	1000	75	75K
06	1000	75	75K
07	1000	75	75K
08	1000	75	75K
09	1000	75	75K
10	1000	75	75K
11	1000	75	75K
12	1000	75	75K
13	1000	75	75K
14	1000	75	75K
15	1000	75	75K
16	1000	75	75K

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					
3					
4					


GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

Yangzhengguo

CHECK

Yangzhengyi

DRAWN

Lviansheng

DATE

2016/08/26

PART NO.

1251H-XX-XX

TITLE:

1.25mm Housing Package

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-106

RoHS

包装图

Note注解:

1.Quantity 数量:

15K PCS/REEL 一卷15K/PCS

10 REEL/BOX 一箱10 卷

150K PCS/BOX 一箱150K/PCS

2.Each reel and outer box must be labeled and
Eco-Label Respectively labeled

每盘和外箱都必须有标签及环保标签分别标示

3.Terminal winding direction as shown

端子缠绕方向如左图所示

4.There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used

每箱不可有脏污, 变形现象, 尾数箱必须用填充物

5.Carton material: K=K, Carton thickness: 6~7mm

纸箱材质:K=K, 纸箱厚度:6~7mm

Adhesive tape胶带

Eco-Label
环保标签

Label

Tape over the terminal

纸带在端子上方

卷装方式

Package way

Label unified on the box top right corner

外箱标签位于右上角

Adhesive tape胶带

Label
标签

260

460

GENERAL TOLERANCE

.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X° ± 0.2

视 角

⊕ ⊖

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lviansheng

2016/08/26

PART NO.

1251T-PXX

TITLE:

1.25mm Terminal Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-053

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5



6

7


8

RoHS

包装图


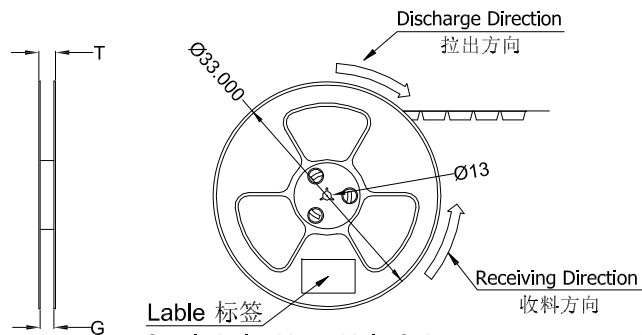
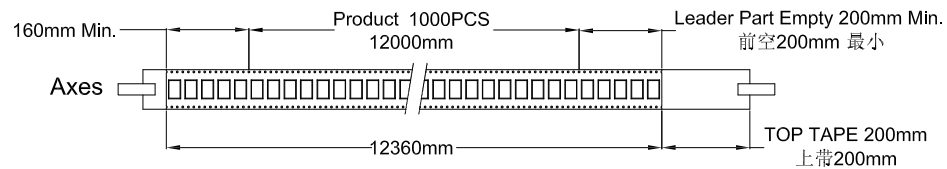


COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

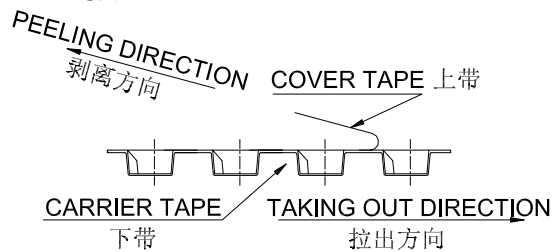

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM ; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Material for PS ; 材质为PS材质
4. Thickness=0.40 ± 0.05 ; 材料厚度为0.40 ± 0.05 mm
5. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

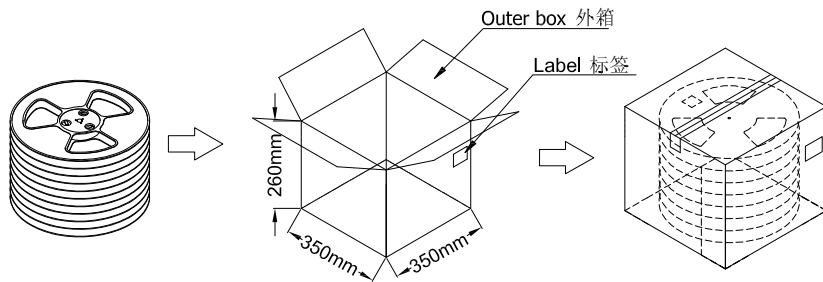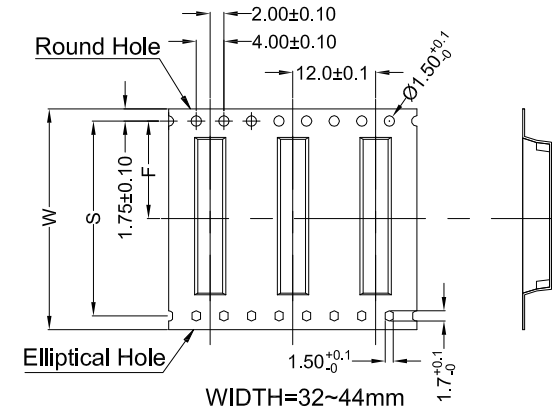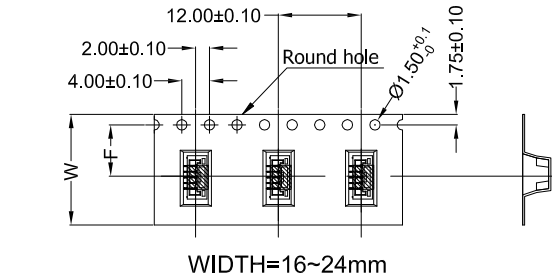

	Carrier Tape No. 载带料号	W	S	F	T	G	REEL PCS	CARTON R	CARTON PCS
ZD1251WVS-XXHF 1251WVS-XX-XXXX	ZD1251WVS-02HF 02Pin~04Pin	16	/	7.50	20.50	16.50	1000	11R	11000
	ZD1251WVS-05HF 05Pin~09Pin	24	/	11.50	28.50	24.50	1000	8R	8000
	ZD1251WVS-10HF 10Pin~12Pin	32	28.40	14.20	36.50	32.50	1000	6R	6000
	ZD1251WVS-13HF 13Pin~16Pin	44	40.40	20.20	48.50	44.50	1000	5R	5000

GENERAL TOLERANCE

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

X° ± 0.2

视 角

视 角

GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

PPN: 1251WVS-XX-XXXX
CTN: ZD1251WVS-XXHF

TITLE:

1.25mm SMT 180° Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-106

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5



6

7

8

RoHS




包装图

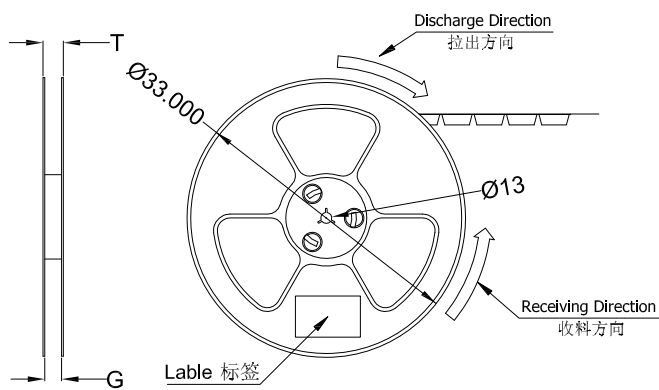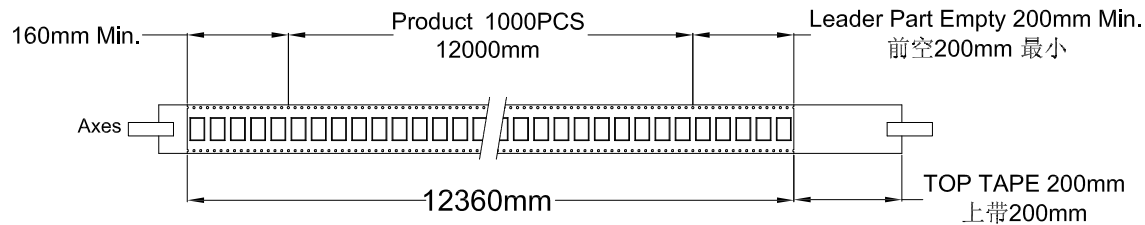

Single hole: None Hole Side
单孔: 贴无链孔侧

Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

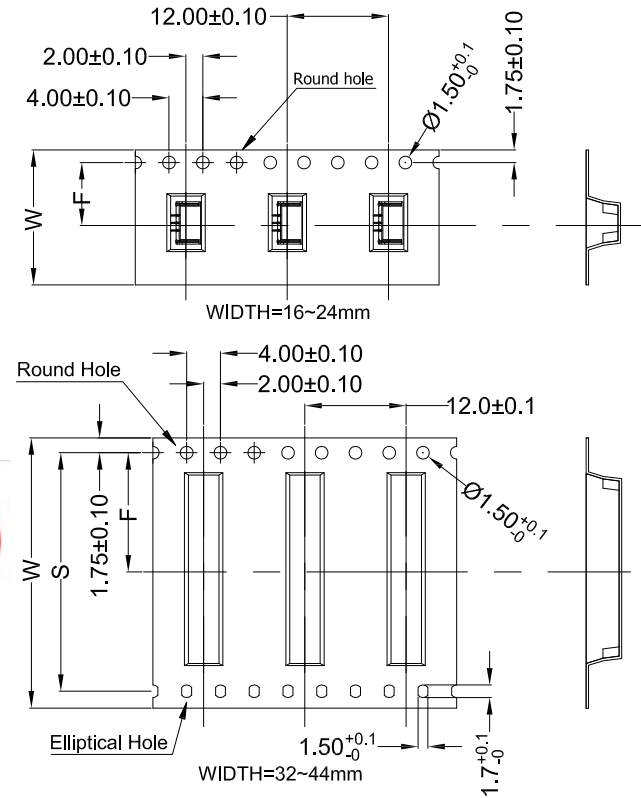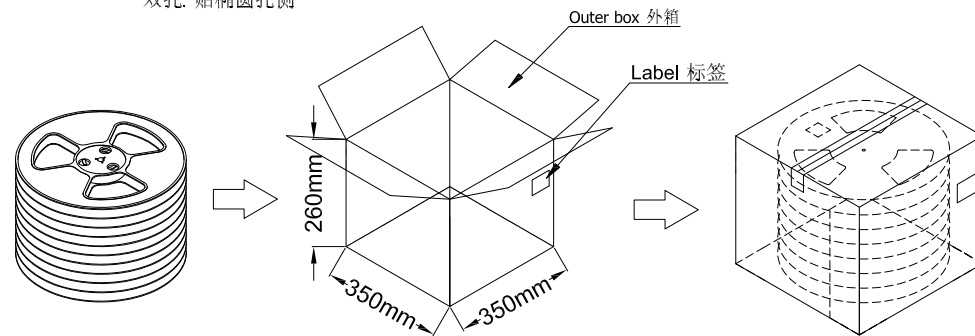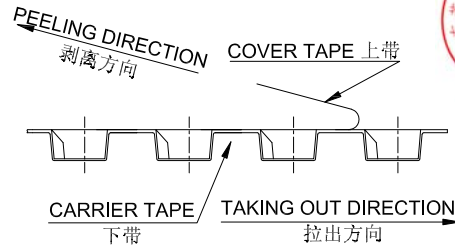


Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2mm ; 圆孔十个孔距离累计允许公差为±0.2mm
- Material for PS ; 材质为PS材质
- Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
- Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

ZD1251WRS-XXHF 1251WRS-XX-XXXX	Carrier Tape No. 载带料号	W	S	F	T	G	REEL PCS	CARTON R	CARTON PCS
	ZD1251WRS-02HF 02Pin~04Pin	16	/	7.50	20.50	16.50	1000	11R	11000
	ZD1251WRS-05HF 05Pin~09Pin	24	/	11.50	28.50	24.50	1000	8R	8000
	ZD1251WRS-10HF 02Pin~04Pin	32	28.40	14.20	36.50	32.50	1000	6R	6000
	ZD1251WRS-13HF 02Pin~04Pin	44	40.40	20.20	48.50	44.50	1000	5R	5000

GENERAL TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10
X° ±0.2°



GYA
Connectors

东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

CHECK

DRAWN

DATE

DATE REV ECN NO. DESCRIPTION MODIFY APPROVAL

PART NO. PPN: 1251WRS-XX-XXXX
CTN: ZD1251WRS-XXHF

TITLE:

1.25mm Housing Package

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-106