

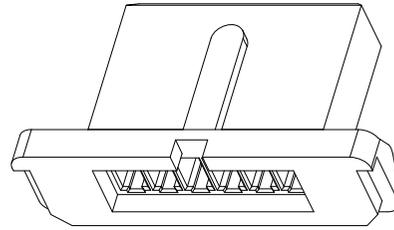
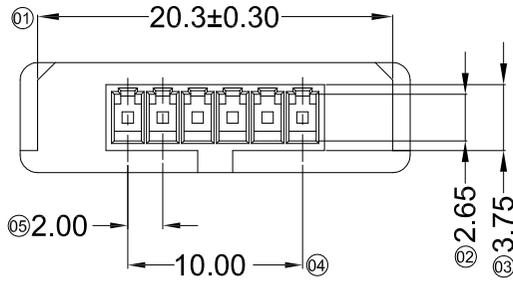


RoHS

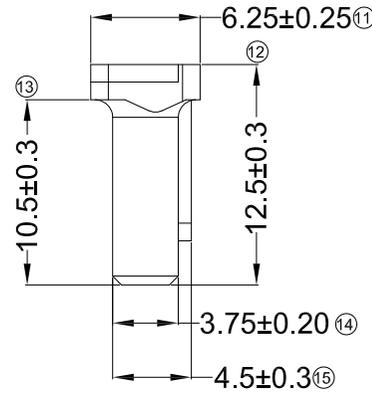

■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Mates With GYA Terminal : 2007T

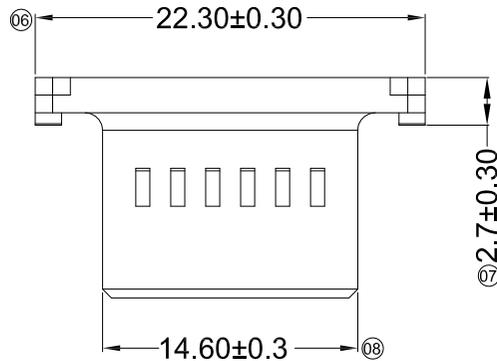

2007 H X -06 X-XX HF X


① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: 06-06P
- ⑤ Plug the Pin & Special No.: Blank-Ordinary
- ⑥ Material : 6T-PA6T 94V-0 N0-PA66 94V-0
- ⑦ HF-Halogen Free
- ⑧ Color: B-Black Blank-Nature

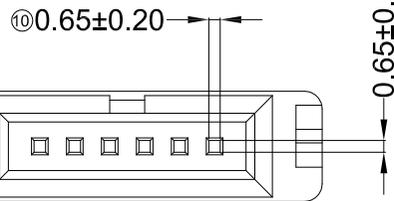

					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., Ltd.				PART NO. 2007H-06-XXHFX				
					PROJECT Yangzhengguo Yangzhengyi Lviansheng 2016/08/26				APPROVAL CHECK DRAWN DATE				TITLE 2.00mm Crimp Style Connector				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	UNIT	SCALE	SHEET	REV	NUMBER							
1						mm	1:1	1/1	A0	A-000							

RoHS

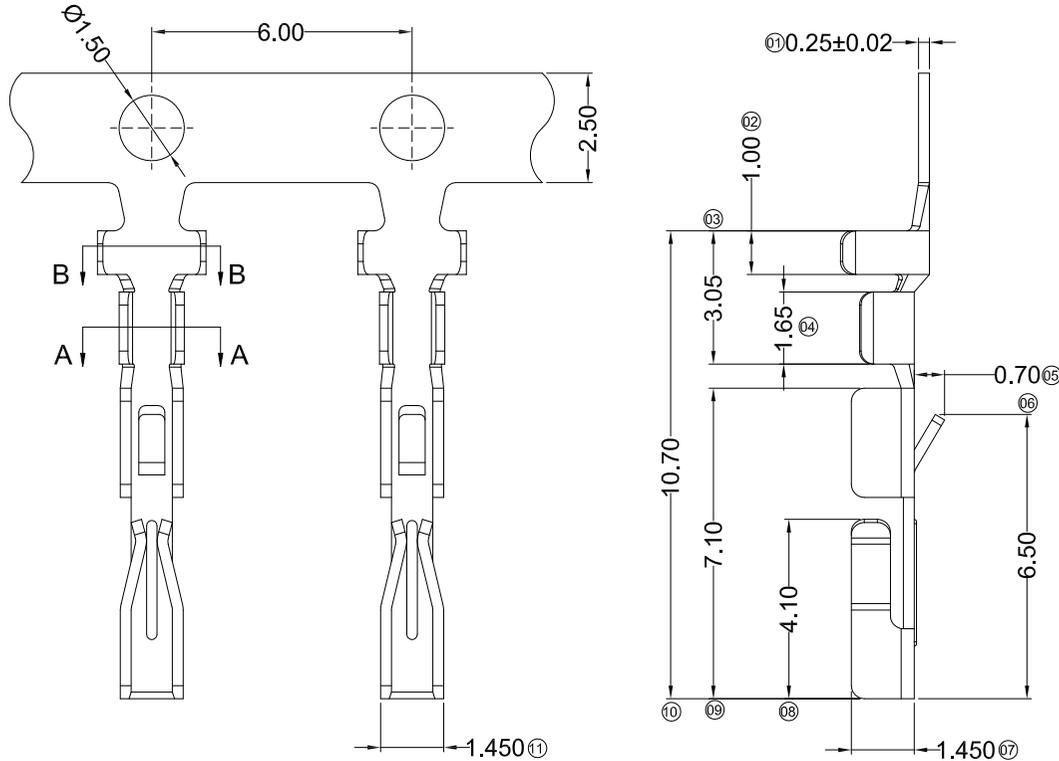




■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: $\geq 1000 \Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$
- Wire Range: AWG#26~28
- Insulation O.D: 1.00mm(Max)
- Mates With GYA Housing : 2007H

2007 T X-P G15 X - X

① ② ③ ④ ⑤ ⑥ ⑦




- ① Series Number
- ② Category: T-Terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating style: G15-Contact Area Gold 15u" ; Crimp Area Bright Tin100u" Min. ; Ni 50u"Min. All over
- ⑥ Plating method: Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.



					GENERAL TOLERANCE .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X.° $\pm 2^\circ$				GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., Ltd.				PART NO. 2007T-PG15X-X																					
					Joshua				APPROVAL				CHECK				DRAWN				DATE													
					PROJECT				Yangzhengguo				Yangzhengyi				Lviansheng				2016/08/26													
DATE					REV					ECN NO.					DESCRIPTION					MODIFY					APPROVAL									
1					2					3					4					5					6					7				
UNIT		SCALE		SHEET		REV		NUMBER		UNIT		SCALE		SHEET		REV		NUMBER																
mm		1:1		1/1		A0		A-000		mm		1:1		1/1		A0		A-000																

TITLE					2.00mm Crimp Style Connectors				
-------	--	--	--	--	-------------------------------	--	--	--	--

RoHS

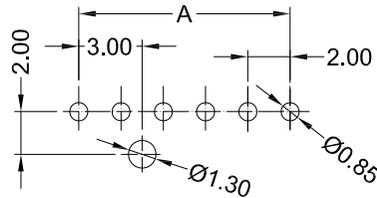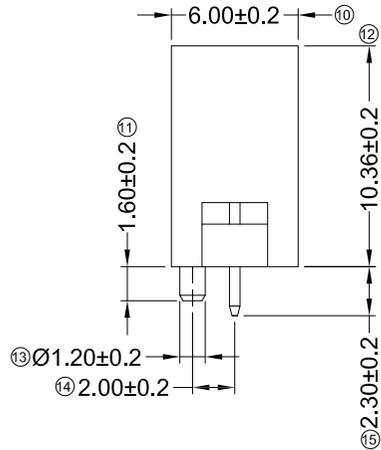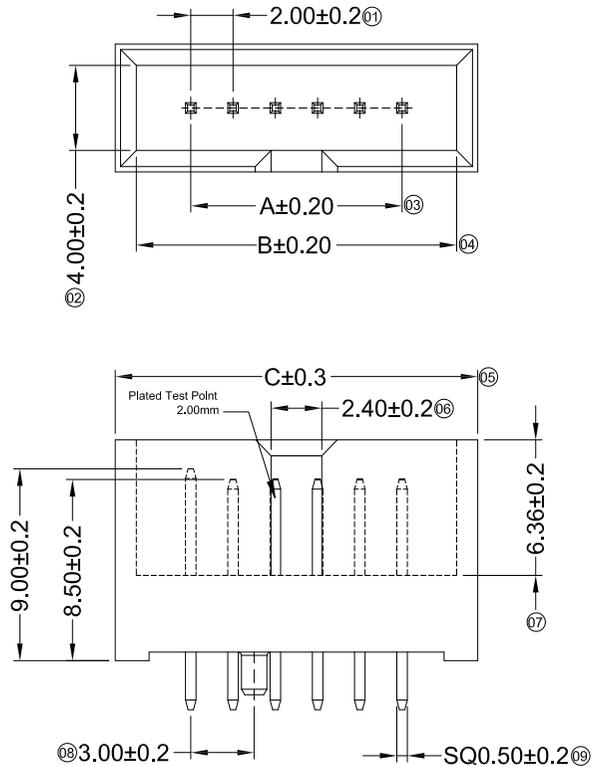

Recommended P.C.B Layout
General Tolerance±0.05

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With GYA Housing:2007H

2007 W V X-XX PA -4T XX XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V- Stright 180°;
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-04P~10P
- ⑥ Plug the Pin & Special No.: P-With Post
A-#1PIN=9.0mm,other PIN 8.50mm
- ⑦ Material: 4T-PA4T 94V-0
- ⑧ Plating Category: V15-Contact Area 15u" Min
Solder Area : Gold flash ; Ni: 50u" Min
- ⑨ Color : Blank-Color Black

Poles	Dimensions (mm)		
	A	B	C
04	6.00	11.10	13.10
05	8.00	13.10	15.10
06	10.00	15.10	17.10
07	12.00	17.10	19.10
08	14.00	19.10	21.10
09	16.00	21.10	23.10
10	18.00	23.10	25.10

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

Yangzhengguo



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL

Yangzhengguo

CHECK

Yangzhengyi

DRAWN

Lvtiansheng

DATE

2016/08/26

PART NO.

2007WV-XXPA-4TV15

TITLE

2.00mm Crimp Style Connector

UNIT

mm

SCALE

1:1

SHEET

1/1

REV

A0

NUMBER

A-000

DATE

1

REV

2

ECN NO.

DESCRIPTION

3

MODIFY

4

APPROVAL

5

APPROVAL

CHECK

DRAWN

DATE

PART NO.

2007WV-XXPA-4TV15

TITLE

2.00mm Crimp Style Connector

UNIT

mm

SCALE

1:1

SHEET

1/1

REV

A0

NUMBER

A-000

DATE

1

REV

2

ECN NO.

DESCRIPTION

3

MODIFY

4

APPROVAL

5

APPROVAL

CHECK

DRAWN

DATE

PART NO.

2007WV-XXPA-4TV15

TITLE

2.00mm Crimp Style Connector

UNIT

mm

SCALE

1:1

SHEET

1/1



REV

A0

NUMBER

A-000

RoHS





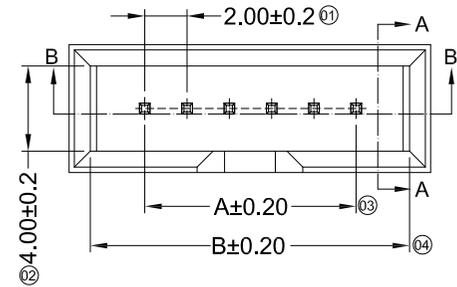


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25° ~+85°
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With GYA Housing: 2007H

2007 W V X-XX P -XX XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V- Stright 180° ;
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-04P~10P
- ⑥ Plug the Pin & Special No.: P-With Post
- ⑦ Material: LP-LCP 94V-0
- ⑧ Plating Category: G15-Contact Area 15u" Min
Solder Area : Matte Tin 100u Min. ; Ni: 50u" Min
- ⑨ Color : Blank- Black

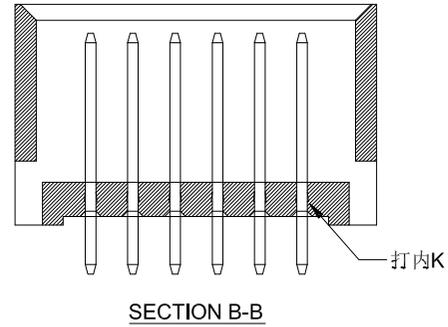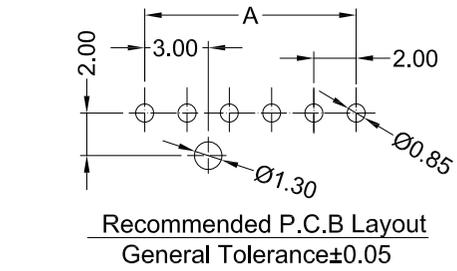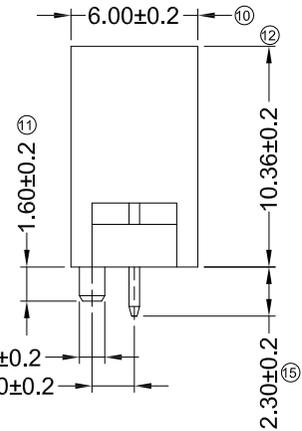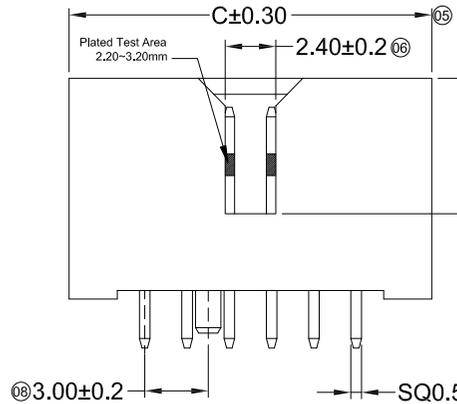

Poles	Dimensions (mm)		
	A	B	C
04	6.00	11.10	13.10
05	8.00	13.10	15.10
06	10.00	15.10	17.10
07	12.00	17.10	19.10
08	14.00	19.10	21.10
09	16.00	21.10	23.10
10	18.00	23.10	25.10

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					
3					
4					



GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10
X.°	±2°
PROJECT	
⊕	□

GYA 东莞市国亚电子有限公司
 Connectors Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangzhengyi	Lvliansheng	2016/08/26

PART NO.				
2007WV-XXP-LPG15XX				
TITLE				
2.00mm Crimp Style Connector				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000




RoHS

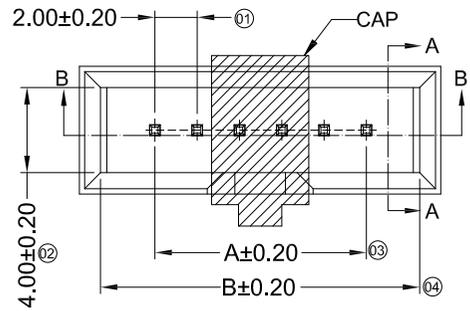


- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 800V AC/minute
 - Temperature range: -25° ~+85°
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤10mΩ
 - After environmental testing: ≤20mΩ
 - Material(Pin): Brass
 - Mates With GYA Housing: 2007H

2007 W V X-XX PC -XX XX XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V- Stright 180° ;
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-04P~10P
- ⑥ Plug the Pin & Special No.: PC-With Cap
- ⑦ Material: LP-LCP 94V-0
- ⑧ Plating Category: G15-Contact Area 15u" Min Solder Area Matte Tin 100u Min. ; Ni: 50u" Min
- ⑨ Color : Blank- Black N-Nature

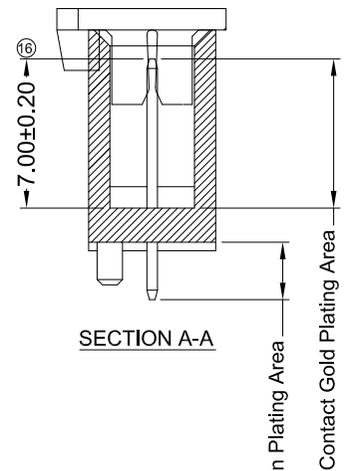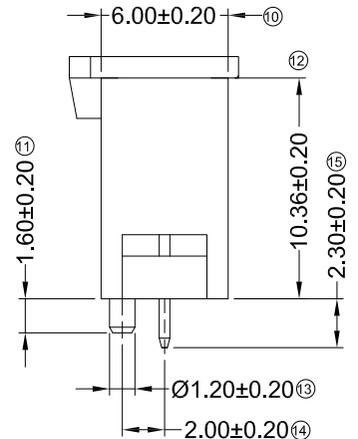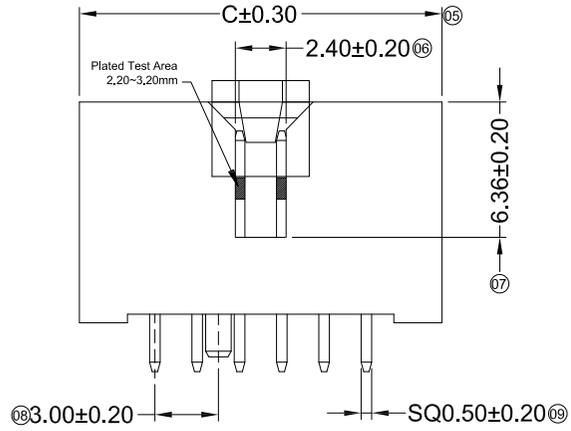

Poles	Dimensions (mm)		
	A	B	C
04	6.00	11.10	13.10
05	8.00	13.10	15.10
06	10.00	15.10	17.10
07	12.00	17.10	19.10
08	14.00	19.10	21.10
09	16.00	21.10	23.10
10	18.00	23.10	25.10

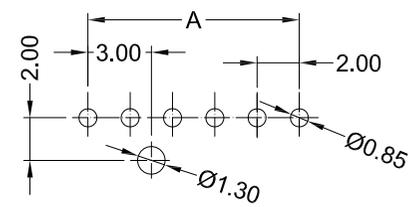

Recommended P.C.B Layout
General Tolerance±0.05

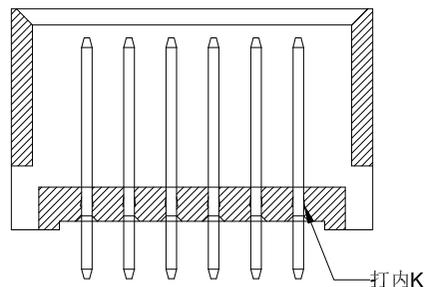

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					
3					
4					

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10
X.°	±2°
PROJECT	
⊕	□

GYA 东莞市国亚电子有限公司
Connectors Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangzhengyi	Lvliansheng	2016/08/26

PART NO. 2007WV-XXPC-LPG15XX				
TITLE 2.00mm Crimp Style Connector				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000