

Note注解:

- Put the housing in PE bag along with a bag of desiccant, then sealed the PE bag and paste a label.
将 Housing放入PE袋内, 并放入一包干燥剂, 并将PE袋封好. 贴上标签.
- Put PE bag packed products in cartons, Packing detail see the table below
将装好产品的PE袋放入纸箱内, 详细包装见下表
- Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
- Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm



Pin 位 Poles	袋 Bag PCS	箱 Box PCS
08	1000	12000

GENERAL TOLERANCE

.X	±0.35
.XX	±0.25
.XXX	±0.15
X°	±0.2°



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL CHECK DRAWN DATE

Yangzhengguo Yangzhengyi Lviansheng 2016/08/26

PART NO.


2010H-XX-PTBK

TITLE:

2.00mm Housing Packing


UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-241

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					
3					
4					


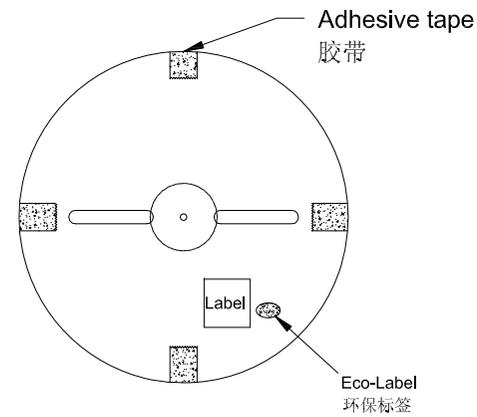


Note 注解:

- Quantity 数量:
10K PCS/REEL 一卷10K/PCS
10 REEL/BOX 一箱10卷
100K PCS/BOX 一箱100K/PCS
- Each reel and outer box must be labeled and Eco-Label Respectively labeled
每盘和外箱都必须有标签及环保标签分别标示
- Terminal winding direction as shown
端子缠绕方向如左图所示
- There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
- Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

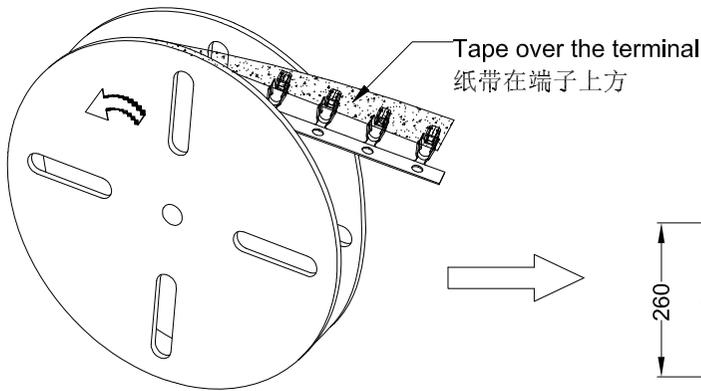



卷装方式
Package way

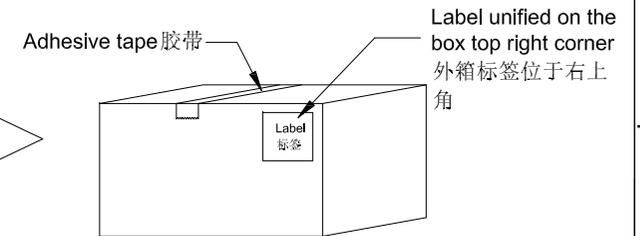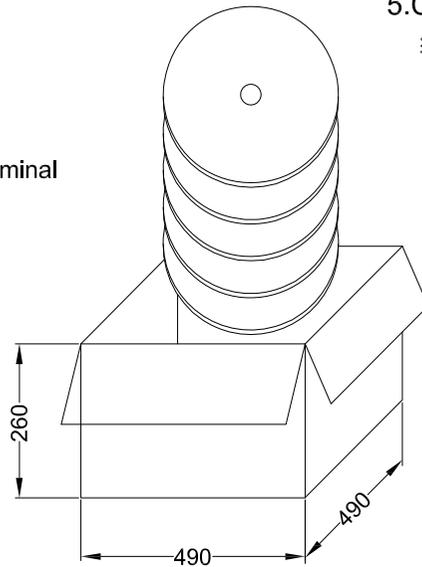




				GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X° ±0.2° 视 角 				GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co.,ltd.				PART NO. 2010T-PSNX-X TITLE: 2.00mm Terminal Packing			
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER	
						Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	mm	1:1	1/1	A0	A-275	





Empty 20holes 后空20穴 7000mm Product 350 PCS Leader Part Empty 20holes 前空20穴

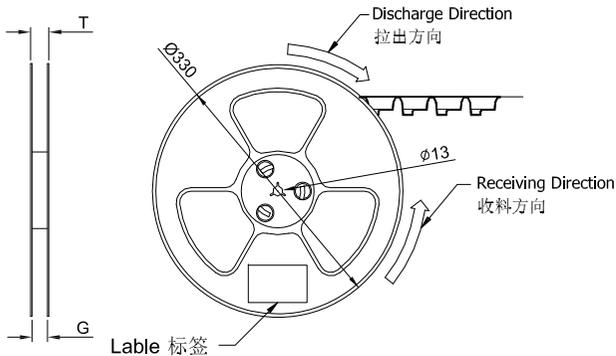

Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

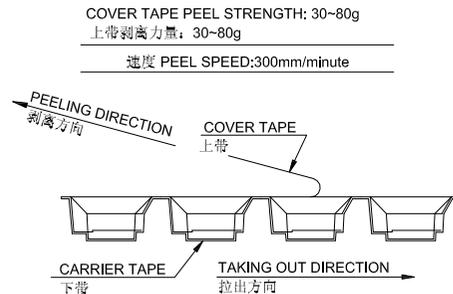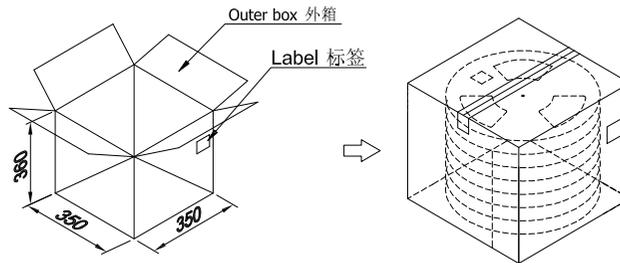

COVER TAPE PEEL STRENGTH: 30-80g
上带剥离力量: 30-80g
速度 PEEL SPEED: 300mm/minute

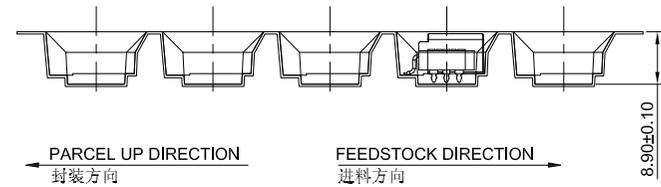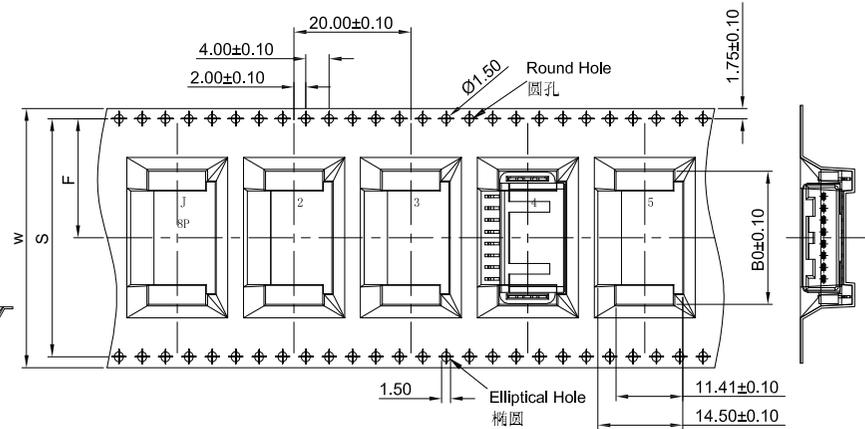

- Note:
- Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
 - 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距离累计允许公差为±0.2mm
 - Carrier tape material for PS; 下带材质为PS材质; Color颜色:Natural透明色
 - bracer保护带: Color颜色:Natural透明色,厚度0.40mm最小
 - Thickness=0.40±0.05; 材料厚度为0.40±0.05mm
 - Cover Tape上带: 冷封上带
 - Carton material纸箱材质:K=K; Carton Thickness 纸箱厚度: 6-7mm

ZD2010WRS-08HF 2010WRS-08-PPSNBK	Carrier Tape No. 载带料号	W	S	F	T	G	Cover Tape(覆带) 上带(W)	Carrier Tape(Color) 下带(颜色)	B0	REEL 卷/PCS	CARTON 箱/R	CARTON 箱/PCS
	ZD2010WRS-08HF	44	40.4	20.20	48.5	44.5	37.5	透明色	22.60	350	7	2450

GENERAL TOLERANCE

.X	±0.30
.XX	±0.20
.XXX	±0.10
X°	±0.2°



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

PART NO. PPN: 2010WRS-08-PPSNBK
CTN: ZD2010WRS-08HF

TITLE: 2.00mm Connectors 90° SMT Packing

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
------	-----	---------	-------------	--------	----------

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000