



RoHS


包装图




PE Bag PE袋



Lable 标签

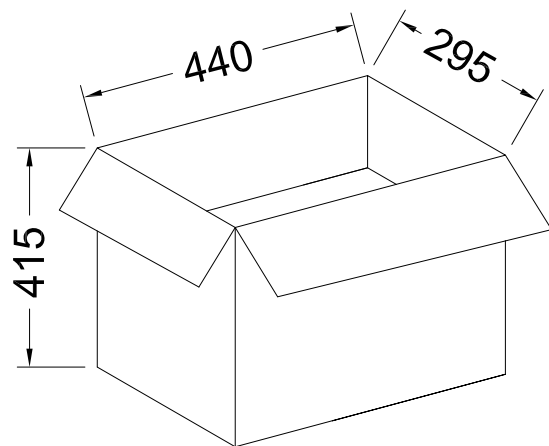

Adhesive Tape 胶带

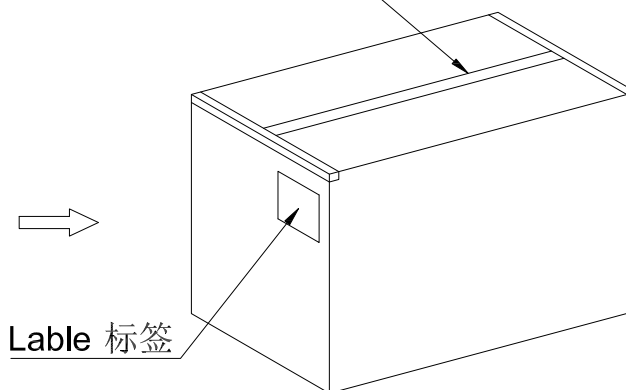

Lable 标签

Note注解:

1. Put Housing in a PE bag, Packing detail see the table below
将 Housing放入PE袋内, 详细包装见下表
2. Put PE bag packed products in specifications of 440 * 295 *415 mm cartons,
Packing detail see the table below
将装好产品的PE袋放入规格为440*295*415mm的纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. Carton material: K=K, Carton thickness 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

Poles	Pcs/Bag	Bag/Carton	Pcs/Carton
02	1000	130	130K
03	1000	120	120K
04	1000	105	105K
05	1000	80	80K
06	1000	72	72K
07	1000	58	58K
08	1000	52	52K
09	1000	48	48K
10	1000	42	45K
12	1000	36	36K
14	1000	30	30K

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2016H-XX-N0HF

TITLE:

2.00mm Housing Packing

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5


6

7


8

RoHS


包装图




PE Bag PE袋



Lable 标签

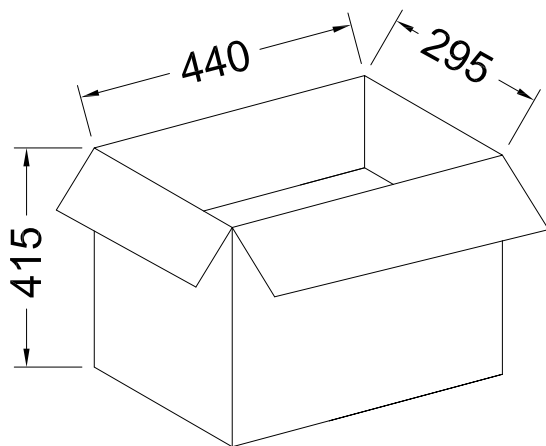

Adhesive Tape 胶带

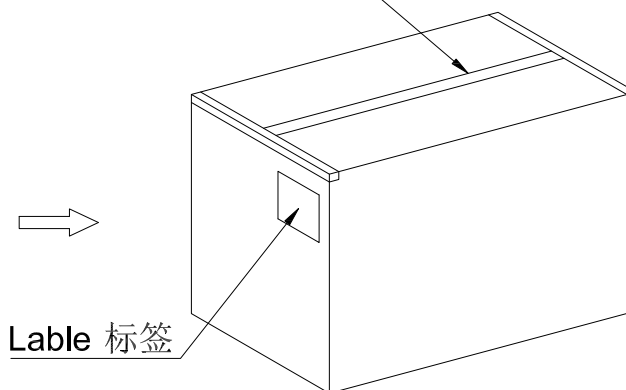

Lable 标签

Note注解:

1. Put Housing in a PE bag, Packing detail see the table below
将 Housing放入PE袋内, 详细包装见下表
2. Put PE bag packed products in specifications of 440 * 295 *415 mm cartons,
Packing detail see the table below
将装好产品的PE袋放入规格为440*295*415mm的纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. Carton material: K=K, Carton thickness 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

Poles	Pcs/Bag	Bag/Carton	Pcs/Carton
02	1000	120	120K
03	1000	110	110K
04	1000	100	100K
05	1000	75	75K
06	1000	70	70K
07	1000	57	57K
08	1000	50	50K
09	1000	47	47K
10	1000	43	43K
12	1000	35	35K

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2016HF-XX-N0

TITLE:

2.00mm Housing Packing

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-043

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5

6

7

8

RoHS

包装图

Adhesive tape胶带

Eco-Label环保标签

Tape over the terminal
纸带在端子 上方卷装方式
Package way

Note注解:

1.Quantity 数量:

20K PCS/REEL 一卷20K/PCS

10 REEL/BOX 一箱10 卷

200K PCS/BOX 一箱200K/PCS

2.Each reel and outer box must be labeled and
Eco-Label Respectively labeled

每盘和外箱都必须有标签及环保标签分别标示

3.Terminal winding direction as shown

端子缠绕方向如左图所示

4.There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used



每箱不可有脏污, 变形现象, 尾数箱必须用填充物

5.Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

Label unified on the box top right corner

外箱标签位于右上角

Adhesive tape胶带

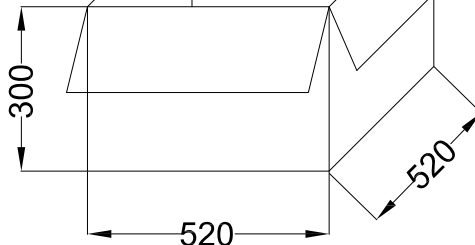Label
标签

GENERAL TOLERANCE

.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X° $\pm 0.2^\circ$

视 角

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2016TM-PSN

TITLE:

2.00mm Terminal Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-043

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

RoHS

包装图

Adhesive tape 胶带

Eco-Label 环保标签

Tape over the terminal
纸带在端子 上方卷装方式
Package way

Note 注解:

1.Quantity 数量:

10K PCS/REEL 一卷10K/PCS

10 REEL/BOX 一箱10 卷

100K PCS/BOX 一箱100K/PCS

2.Each reel and outer box must be labeled and
Eco-Label Respectively labeled

每盘和外箱都必须有标签及环保标签分别标示

3.Terminal winding direction as shown

端子缠绕方向如左图所示

4.There shall be no dirt such as deformation phenomenon,
Mantissa box fillers must be used



每箱不可有脏污, 变形现象, 尾数箱必须用填充物

5.Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

Label unified on the box top right corner

外箱标签位于右上角



Adhesive tape 胶带

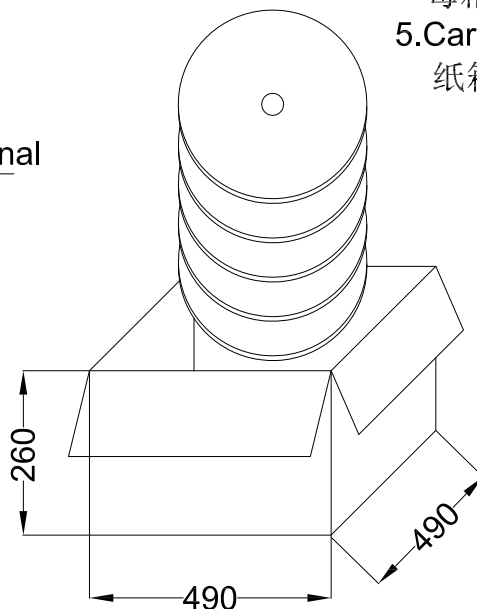Label
标签




						GENERAL TOLERANCE		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.				PART NO.			
						.X	±0.30					2016T-PXX-XX			
						.XX	±0.20	APPROVAL				TITLE:			
						.XXX	±0.10					2.00mm Terminal Packing			
						X°	±0.2°	CHECK		DRAWN		DATE		UNIT	SCALE
						视图		Yangzhengguo		Yangzhengyi		Lvtiansheng		mm	1:1
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL			2016/08/26						SHEET	REV
1														1/1	A0
														NUMBER	A-000

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 180 * 260* 0.10 mm, Packing detail see the table below
将 Housing放入PE袋内, PE袋规为:180*260*0.10mm, 详细包装见下表
2. Put PE bag packed products in specifications of 355 * 355 * 340 mm cartons, Packing detail see the table below
将装好产品的PE袋放入规格为355 * 355 * 340mm的纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm

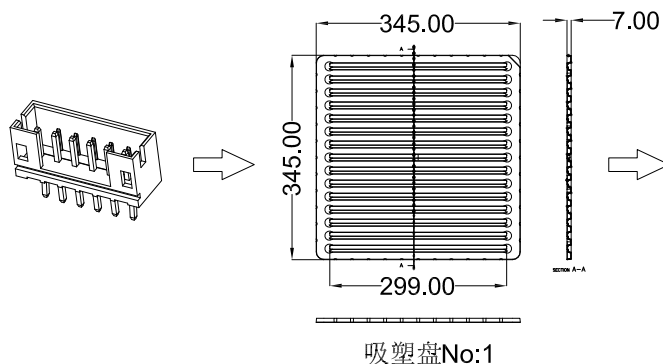

吸塑盘No:2

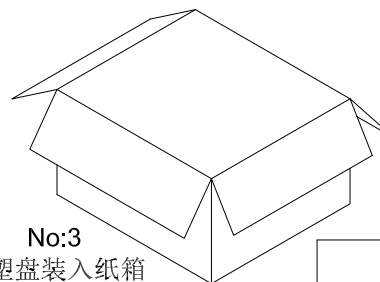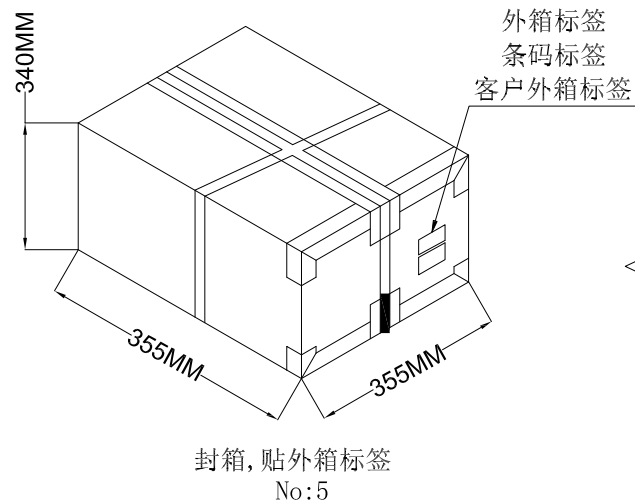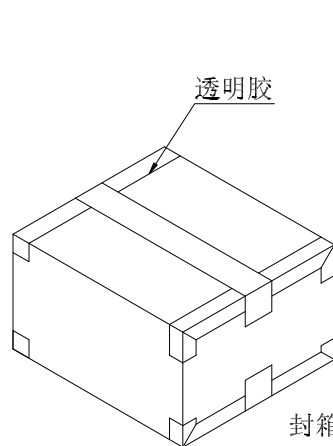No:3
吸塑盘装入纸箱
(45盘纸箱)封箱, 贴外箱标签
No:5外箱标签
条码标签
客户外箱标签封箱
No:4

透明胶



料 号	PIN	每盘 PCS	每盘 箱	每箱 PCS
2016WV-02-XXXX	02	735	45	33075
2016WV-03-XXXX	03	540	45	24300
2016WV-04-XXXX	04	435	45	19575
2016WV-05-XXXX	05	360	45	16200
2016WV-06-XXXX	06	315	45	14175
2016WV-07XXXX	07	270	45	12150
2016WV-08-XXXX	08	240	45	10800
2016WV-09-XXXX	09	210	45	9450
2016WV-10-XXXX	10	195	45	8775
2016WV-11-XXXX	11	180	45	8100
2016WV-12-XXXX	12	165	45	7425
2016WV-13-XXXX	13	150	45	6750
2016WV-14-XXXX	14	135	45	6075
2016WV-15-XXXX	15	135	45	6075

						GENERAL TOLERANCE				PART NO.			
						.X	±0.30	GYA Connectors		东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.		2016WV-XX-XXXX	
						.XX	±0.20					TITLE: 2.00mm DIP Vertical Package	
						.XXX	±0.10						
						X°	±0.2°					UNIT	SCALE
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	APPROVAL		CHECK		DRAWN		DATE	
1						Yangzhengguo		Yangzhengyi		Lvtiansheng		2016/08/26	
						视角						SHEET	REV
												mm	1:1
												1/1	A0
												NUMBER	A-000

RoHS


包装图



PE袋


DESICCANT
干燥剂

Lable 标签

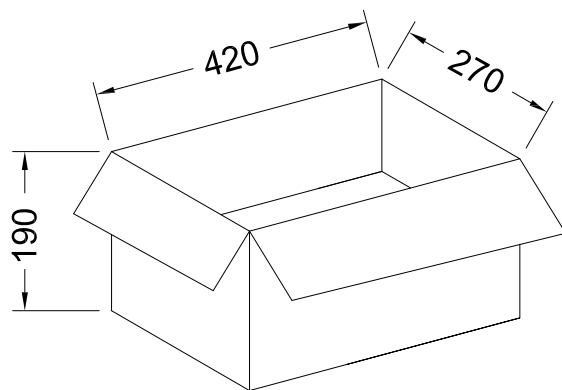

胶带ADHESIVE TAPE

标签LABEL

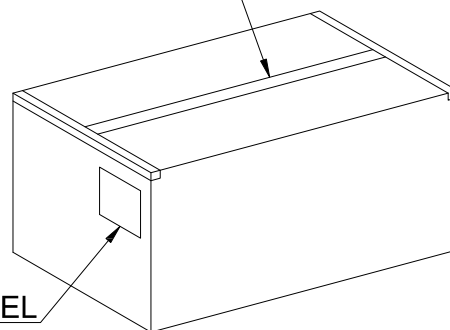

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 180 * 260* 0.10 mm, Packing detail see the table below

将 Housing放入PE袋内, PE袋规为:180*260*0.10mm, 详细包装见下表

2. Put PE bag packed products in specifications of 420 * 270 * 190 mm cartons, Packing detail see the table below

将装好产品的PE袋放入规格为420*270*190mm的纸箱内, 详细包装见下表

3. Label depends on customer request, carton opening joint with transparent tape

标签依客户要求而定, 纸箱开口处用透明胶带贴合.

4. Carton material: K=K, Carton thickness: 6~7mm

纸箱材质:K=K, 纸箱厚度:6~7mm



Poles	Bag PCS	CARTON Bag	CARTON PCS
02	1000	20	20K
03			
04			
05			
06			
07	500	10	10K
08			
09			
10			
11			
12			
13			
14			
15			

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视角

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2016WV-XXK-XXXX

TITLE:

2.00mm WAFER Packing

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE

REV

ECN NO.


DESCRIPTION

MODIFY


APPROVAL

RoHS

包装图




PE袋



DESICCANT

干燥剂

Lable标签

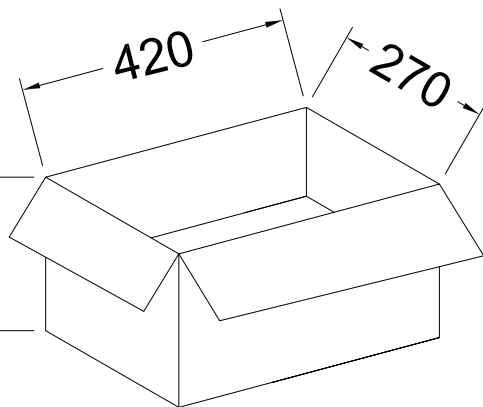胶带
ADHESIVE TAPE

标签LABEL

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 180 * 260* 0.08 mm, Packing detail see the table below

将 Housing放入PE袋内, PE袋规为:180*260*0.10mm, 详细包装见下表

2. Put PE bag packed products in specifications of 420 * 270 * 190 mm cartons, Packing detail see the table below



将装好产品的PE袋放入规格为420*270*190mm的纸箱内, 详细包装见下表

3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.

4. Carton material: K=K, Carton thickness: 6~7mm
纸箱材质:K=K, 纸箱厚度:6~7mm




Poles	Bag PCS	CARTON Bag	CARTON PCS
02	1000	20	20K
03			
04			
05			
06			
07	500	10	10K
08			
09			
10			
11			
12			
13			
14			
15			

						GENERAL TOLERANCE		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.				PART NO.			
						.X	±0.30					2016WR-1xXX-N0NBXXBR001F			
						.XX	±0.20	APPROVAL				TITLE:			
						.XXX	±0.10					2.00mm DIP Vertical Package			
						X°	±0.2°	CHECK		DRAWN		DATE		UNIT	SCALE
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Yangzhengguo		Yangzhengyi		Lvtiansheng		2016/08/26		mm	1:1
1														1/1	A
														A	A-039

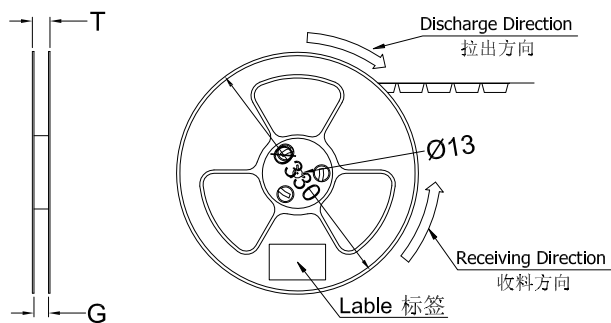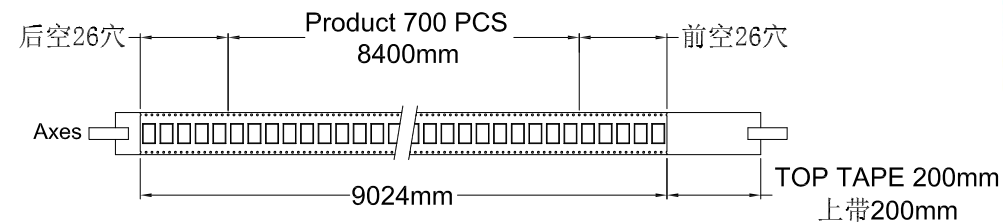

Single hole: None Hole Side
单孔: 贴无链孔侧

Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

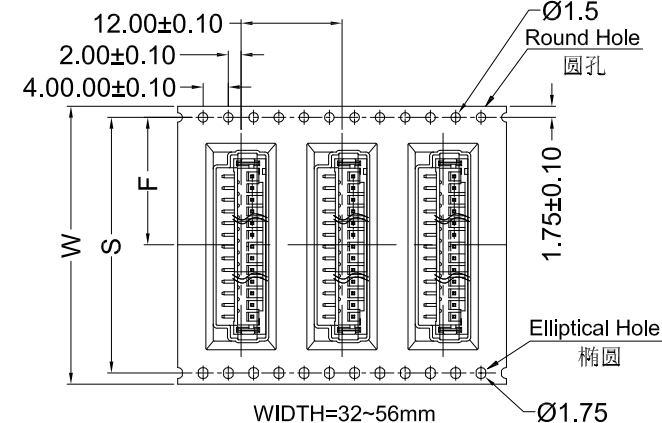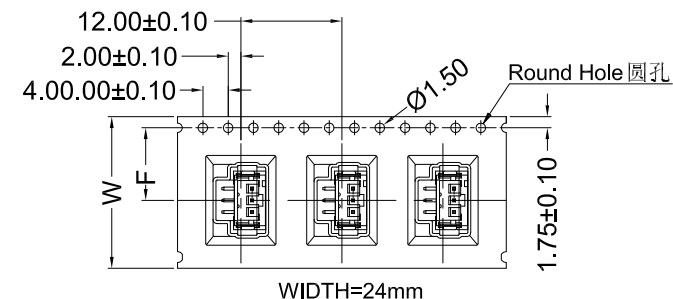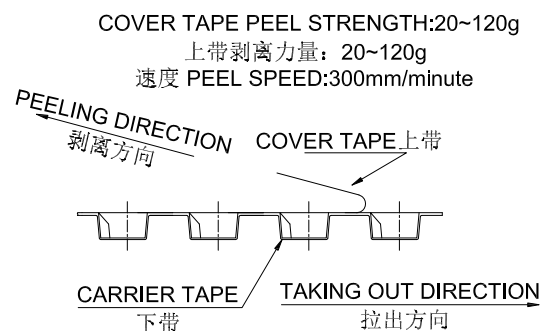

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距累计允许公差为±0.2mm
3. Material for PET ; 材质为PET材质, Color颜色: Natural透明色
4. bracer保护带: Color颜色:Natural透明色;厚度0.40mm最小
5. Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
6. Outer box 外箱纸质 B=C ; Thickness 厚度: 6~7mm

	Pin No.	W	S	F	T	G	REEL PCS	CARTON R	CARTON PCS
ZD2016WVS-XXHF 2016WVS-XX-9TSW	2Pin~4Pin	24	/	11.5	28.5	24.5	700	11	7700
	5Pin~8Pin	32	28.4	14.2	36.5	32.5		9	6300
	9Pin~13Pin	44	40.4	20.2	48.5	44.5		6	4200
	14Pin~16Pin	56	52.4	26.2	60.5	56.5		5	3500

GENERAL TOLERANCE


.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

视 角



东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., ltd.

PART NO.

PPN: 2016WVS-XX-XXSWXX
CTN: ZD2016WVS-XXHF

TITLE:

2.00mm Connectors 180° Package

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-253

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
------	-----	---------	-------------	--------	----------

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26



RoHS

包装图

Empty 10holes
空10穴Product 900 PCS
14400mmLeader Part Empty 14holes
前空14穴

Axes

14784mm

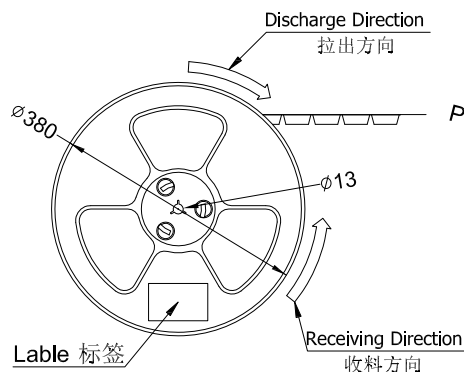TOP TAPE 200mm
上带200mm(冷封)



Lable 标签

Single hole: None Hole Side

单孔: 贴无链孔侧

Double hole: Elliptical Hole Side

双孔: 贴椭圆孔侧

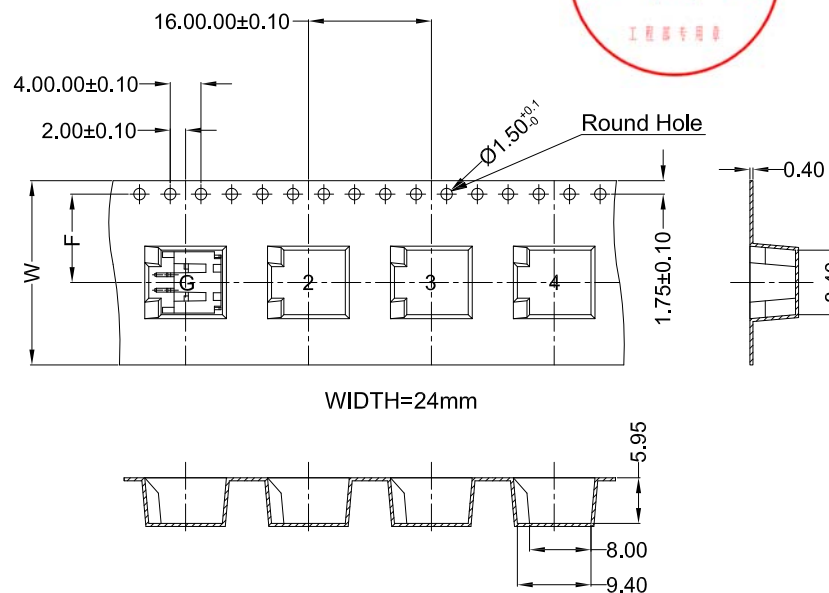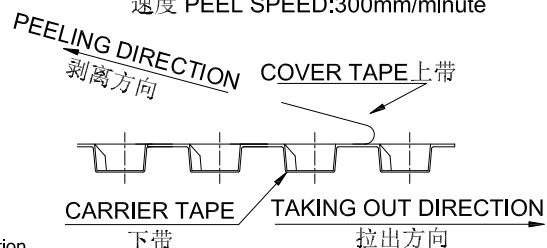
COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM ; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Materal for PS Black ; 材质为PS材质 透明色
4. Thinkess=0.40 ± 0.05 ; 材料厚度为0.40 ± 0.05 mm
5. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

ZD2016WRS-02QHF	Pin No.	W	S	F	T	G	Cover Tape (宽度) 上带 (W)	Carrier Tape (Color) 下带 (颜色)	REEL PCS	CARTON R	CARTON PCS
2016WRS-02Q-9TSN	ZD2016WRS-02QHF	24	/	11.50	29.5	25.4	21.3	透明色	900	12	10800

GENERAL TOLERANCE

.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 X° $\pm 0.2^\circ$ GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

PPN: 2016WRS-02Q-9TSN
CPN: ZD2016WRS-02QHF

TITLE:

2.00mm Connectors 90° Packing

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-332

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5

6

7



8

RoHS


包装图

Empty 10holes
空10穴Product 1000 PCS
12000mmLeader Part Empty 14holes
前空14穴

Axes

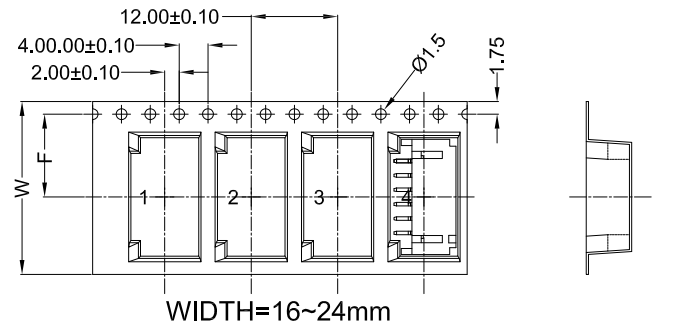TOP TAPE 200mm
上带200mm

WIDTH=16~24mm

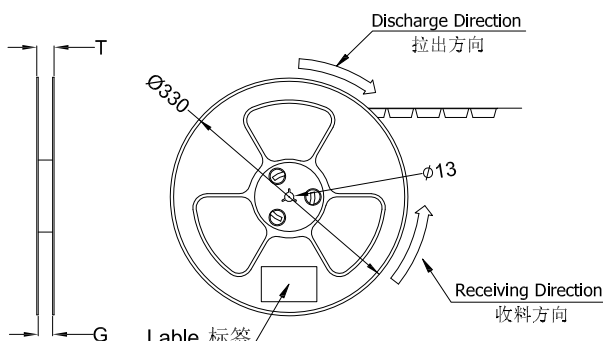



Lable 标签

Single hole: None Hole Side

单孔: 贴无链孔侧

Double hole: Elliptical Hole Side

双孔: 贴椭圆孔侧

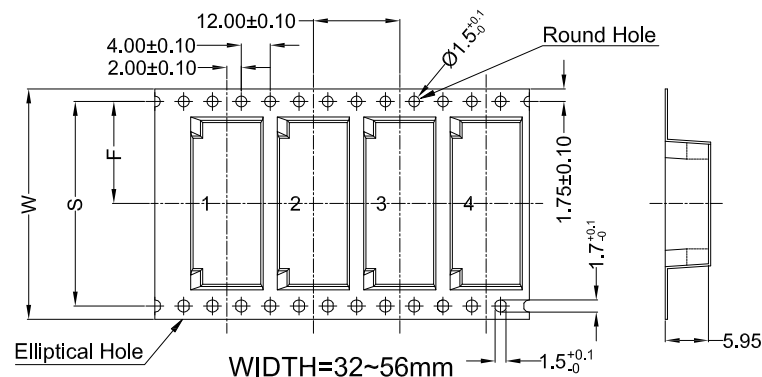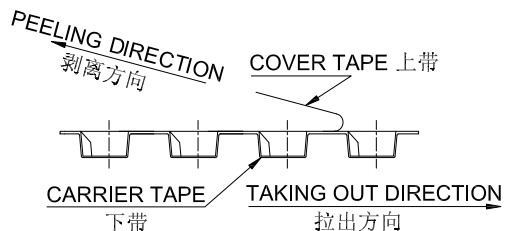COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

WIDTH=32~56mm

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
3. Materal for PS Natural ; 材质为PS材质 透明色
4. Thinkess=0.40±0.05 ; 材料厚度为0.40±0.05mm
5. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

	Pin No.	W	S	F	T	G	Cover Tape (宽度) 上带(W)	Carrier Tape(Color) 下带(颜色)	REEL PCS	CARTON R	CARTON PCS
ZD2016WRS-XXHF 2016WRS-XX-XXXX	ZD2016WRS-02HF	16	/	7.50	20.5	16.4	13.3	透明色	1000	11	11000
	ZD2016WRS-03HF	24	/	11.50	29.5	25.4	21.3		1000	8	8000
	ZD2016WRS-04HF										
	ZD2016WRS-05HF 5Pin~8Pin	32	28.4	15.50	36.5	32.4	25.5		1000	6	6000
	ZD2016WRS-09HF 9Pin~14Pin	44	40.4	20.20	47.0	45.5	37.5		1000	5	5000
	ZD2016WRS-15HF ZD2016WRS-16HF	56	52.4	28.50	60.5	56.4	49.5		1000	3	3000

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±0.2°

GYA
Connectors东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., ltd.

PART NO.

PPN: 2016WRS-XX-XXXX
CTN: ZD2016WRS-XXHF

TITLE:

2.00mm Connectors 90° Packing

DATE REV ECN NO.

DESCRIPTION

MODIFY

APPROVAL



APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

UNIT

SCALE

SHEET

REV

NUMBER

mm

1:1

1/1

A0

A-332