

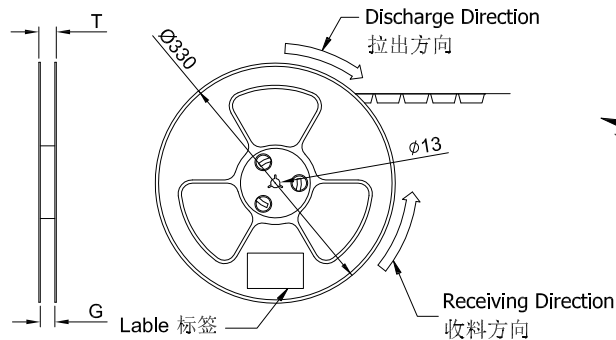


RoHS



包装图

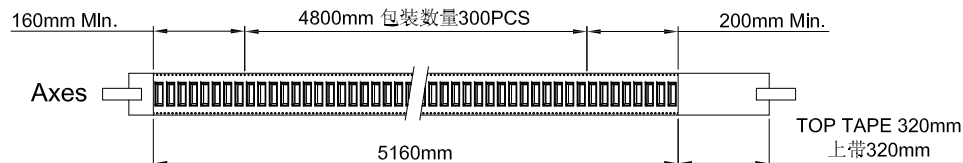

COVER TAPE PEEL STRENGTH:20~120g
剥离力量20~120g
速度 PEEL SPEED:300mm/minute


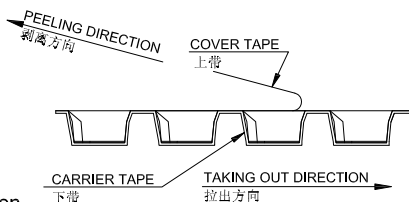


Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

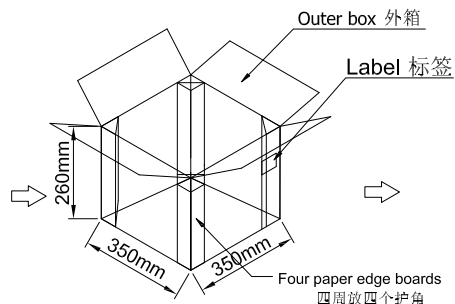

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM ; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
3. Material for PS ; 材质为PS材质; Color 颜色: Natural 透明
4. bracer 保护带: Color 颜色: Natural 透明; 厚度0.40mm 最小
5. Thickness=0.50 ± 0.05 ; 材料厚度为0.50 ± 0.05 mm
6. Cover Tape 上带: 冷封
7. Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm

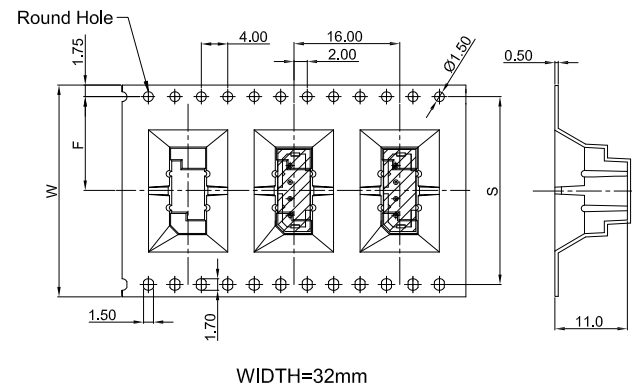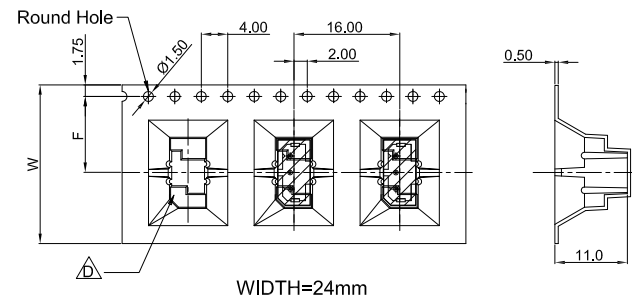


ZD2502WV-XXHF 2502WV-XXXX-LPXXXX-XX	Pin No.	W	S	F	T	G	Cover Tape(W) 上带(宽度)	Carrier Tape(Color) 下带(颜色)	REEL /PCS	CARTON /R	CARTON /PCS
	ZD2502WV-03HF	24	-	11.5	28.50	24.40	21.3	透明色	300	8R	2400
	ZD2502WV-04HF	32	28.4	14.2	36.50	32.40	25.5	透明色	300	6R	1800
	ZD2502WV-05HF										

						GENERAL TOLERANCE				GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				PART NO. PPN: 2502WV-XXXX-LPXXXX- CPN: ZD2502WV-XXHF				
						.X ±0.35								TITLE: 2.50mm DIP 180° Package				
						.XX ±0.25												
						.XXX ±0.15												
						X° ±0.2°												
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	视 角 	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER			
						Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	MM	1 : 1	1/1	A0	A-203				

RoHS

包装图

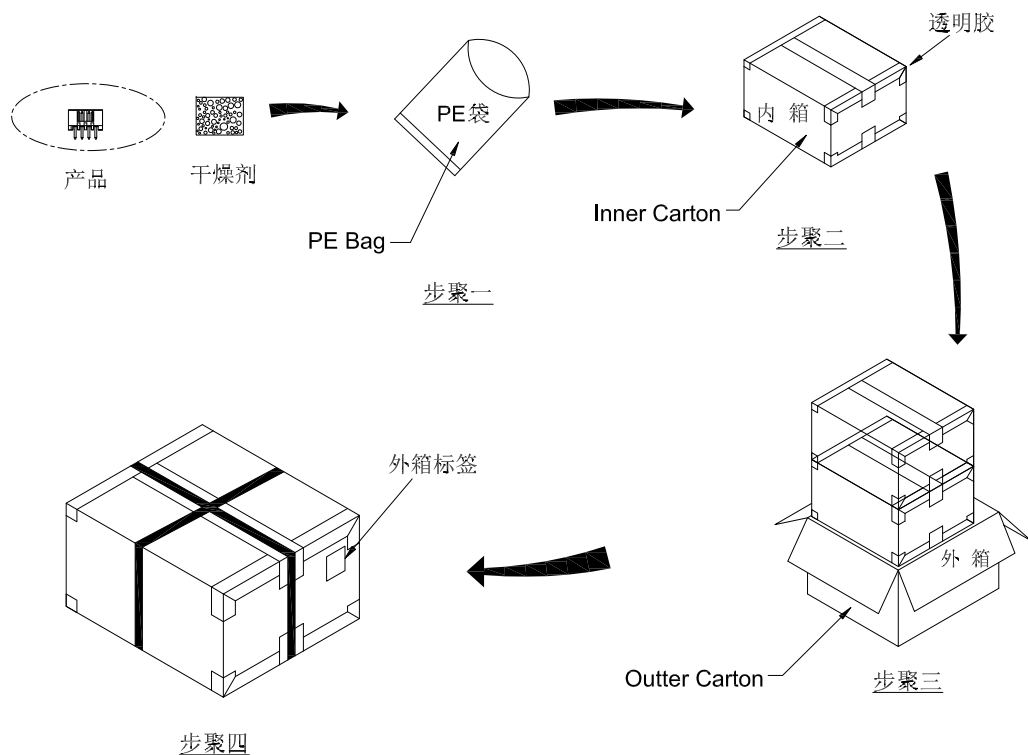

包装说明:

步骤1: 将检验好之产品依包装数量装入PE袋中, 并放入一包干燥剂, 并将PE袋封好, 贴上标签.

步骤2: 将装好产品的PE袋依包装数量, 装入内箱并用透明胶四周封好, 贴上标签.

步骤3: 将装好产品的内箱套入外箱. (一大箱装二小箱)

步骤4: 用透明胶把外箱封好并在外箱上贴上标签, 再用包扎带包扎好.

注: 尾数可用填充物填充.



Part No.	PIN	PE Bag		Inner Carton		Outer Carton		Total
		PCS/PE	SIZE (CM)	BAG/Inner Carton	SIZE (CM)	Inner Carton/Outer Carton	SIZE (CM)	2 Inner Carton/Outer Carton
2502WV-XXXX-LPXXXX-B-XX	03	1000	17.5x25.5x0.0075	25	34x34x15.5	2	35.5x35.5x34	50,000
	04	1000	17.5x25.5x0.0075	25	34x34x15.5	2	35.5x35.5x34	50,000
	05	1000	17.5x25.5x0.0075	20	34x34x15.5	2	35.5x35.5x34	40,000

GENERAL TOLERANCE

.X ± 0.35 .XX ± 0.25 .XXX ± 0.15 X° $\pm 0.2^\circ$

视角

GYA
Connectors

东莞市国亚电子有限公司

Dong Guan Guo Ya Connectors co., ltd.

APPROVAL

CHECK

DRAWN

DATE

Yangzhengguo

Yangzhengyi

Lvtiansheng

2016/08/26

PART NO.

2502WV-XXXX-LPXXXX-B-XX

TITLE:

2.50mm DIP 180° Package

UNIT	SCALE	SHEET	REV	NUMBER
MM	1:1	1/1	A0	A-000

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL

1

2

3

4

5

6

7

8